

JeaTone

www.jeatone.com



www.jeatone.com



www.jeatone.net

ZhuHai JeaTone Electronic Co.,Ltd

Address: 4th floor, Building 5, No. 19, Yongtian Road,
Xiangzhou District, Zhuhai City, Guangdong Province,China

Tel: 0756-6900635

Mob/Wechat: +86 13727002212

E-Mail: Justin@jeatone.com

Website: www.jeatone.com / www.jeatone.net



Reliable
Quality



OEM / ODM
Service



Professional
Service

VIDEO DOOR ENTRY SYSTEM
PRODUCT CATALOGUE

CATALOGUE

Instruction P1-P2

Indoor Monitor P3

Outdoor station P4

Specification and Diagram P5-P8



2 wire busing line

PRODUCT DETAILS INTRODUCTION

BUSing is an intuitive system of simple programming. It is coming into 2 versions, one without WiFi, the another is WiFi supportive and integrating with Tuya IOT platform for controlling on App remotely at anywhere and anytime. It is suitable to the simplest homes(grand villas) and the simple complex buildings.



SYSTEM UNIQUE ADVANTAGE

- > **BUSing** is an intuitive system of simple programming.
- > It is coming into 2 versions, one without WiFi, the another is WiFi supportive and integrating with Tuya IOT platform for controlling on App remotely at anywhere and anytime.
- > It is suitable to the simplest homes(grand villas) and the simple complex buildings.
- > The door sation is available from 1 button to 32 buttons with ultra wide camera view angle up to 130° / 170° and IP65 waterproof function.





NB82729KM

7" mechanical button with mute mode

- * 32G SD card storage for record
- * Voice mail
- * Monitor relay
- * Call transfer



NB82727EM/ NB86727EM

7" touch sensor button with GUI menu

Available in WiFi version and Non WiFi version

- * 32G SD card storage for record
- * Voice mail/replay
- * TuyaSmart & Smartlife App supportive
- * Customizable App & GUI service



NB82706TM/ NB86706TM

7" capacitive touch button with GUI menu

Available in WiFi version and Non WiFi version


- * 32G SD card storage for record
- * Voice mail
- * TuyaSmart & Smartlife App supportive
- * Customizable App & GUI service



NB83251A

Fish-eye wide angle camera sensor available in surface & flush mount


- * Metallic frame body to be service longer time
- * Outstanding waterproof performance-IP65
- * Customizable color/ adjustable door open time & volume

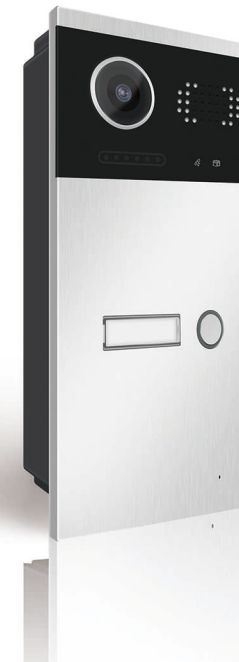

NB82251A-1
(1 button 1 name plate)



NB82251A-2
(2 buttons 2 name plates)

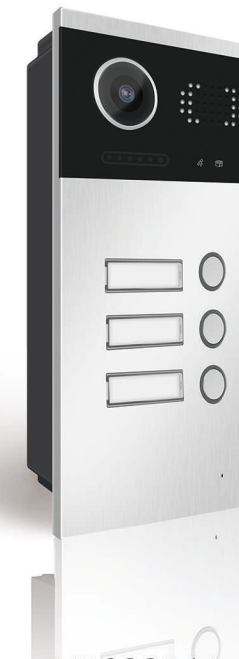


NB82251A-3
(3 buttons 3 name plates)



NB82251A-4
(4 buttons 4 name plates)



Diagram :

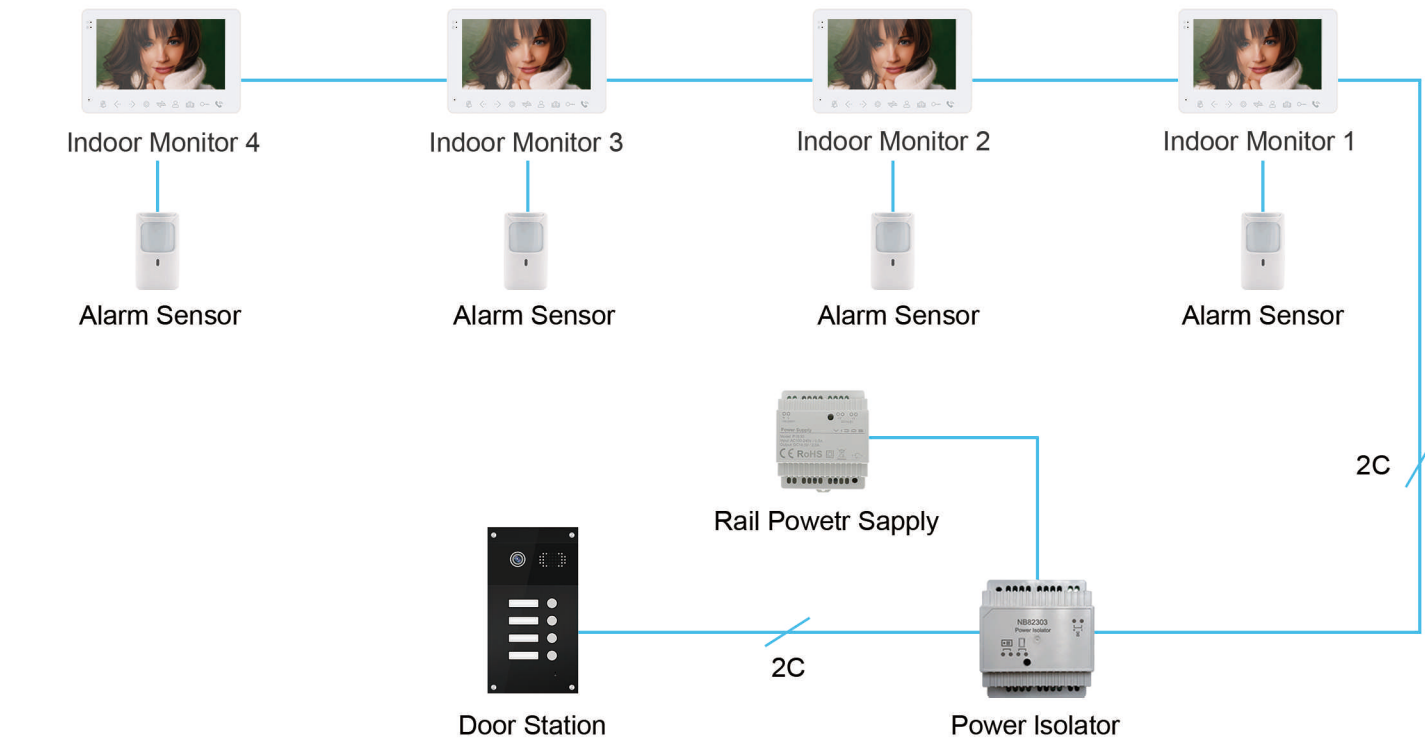

TOUCH SENSOR - NB82727EM

7" touch sensor button with GUI menu
Available in WiFi version and Non WiFi version


- * 32G SD card storage for record
- * Voice mail/ Monitor relay/Call transfer /changeable ring-tong
- * Cell phone connectivity is available via Tuyasmart/ Smartlife App
- * Point to point internal call from one monitor to another one
- * Customizable case'color, GUI graphics, feature service



Part Number (Indoor Monitor)	NB82729KM	NB82727EM/ NB86727EM	NB82730TM/ NB86730TM
Image			
Operation System	2 Wire BUS system	2 Wire BUS system	2 Wire BUS system
Display Screen	7" TFT LCD screen	7" TFT LCD screen	7" TFT LCD screen
Display Definition	800x480	800x480	800x480
Calling Mode	Duplicate communication	Duplicate communication	Duplicate communication
Calling Time	120s	120s	120s
Unlocking Time	2-10 seconds	2-10 seconds	2-10 seconds
Standby Current	Maximum 250mA	Maximum 20mA	Maximum 20mA
Working Current	Maximum 600mA	Maximum 300mA	Maximum 300mA
Power Supply	Din-rail power	Din-rail power	Din-rail power
Operation Temp.	-10°C to +55°C (14°F to 122°F)	-10°C to +55°C (14°F to 122°F)	-10°C to +55°C (14°F to 122°F)
Mounting	Surface mount	Surface mount	Surface mount
Internal call	Yes	Yes	Yes
Cell phone connectivity (Tuyasmart App)	No	Yes	Yes



Diagram :

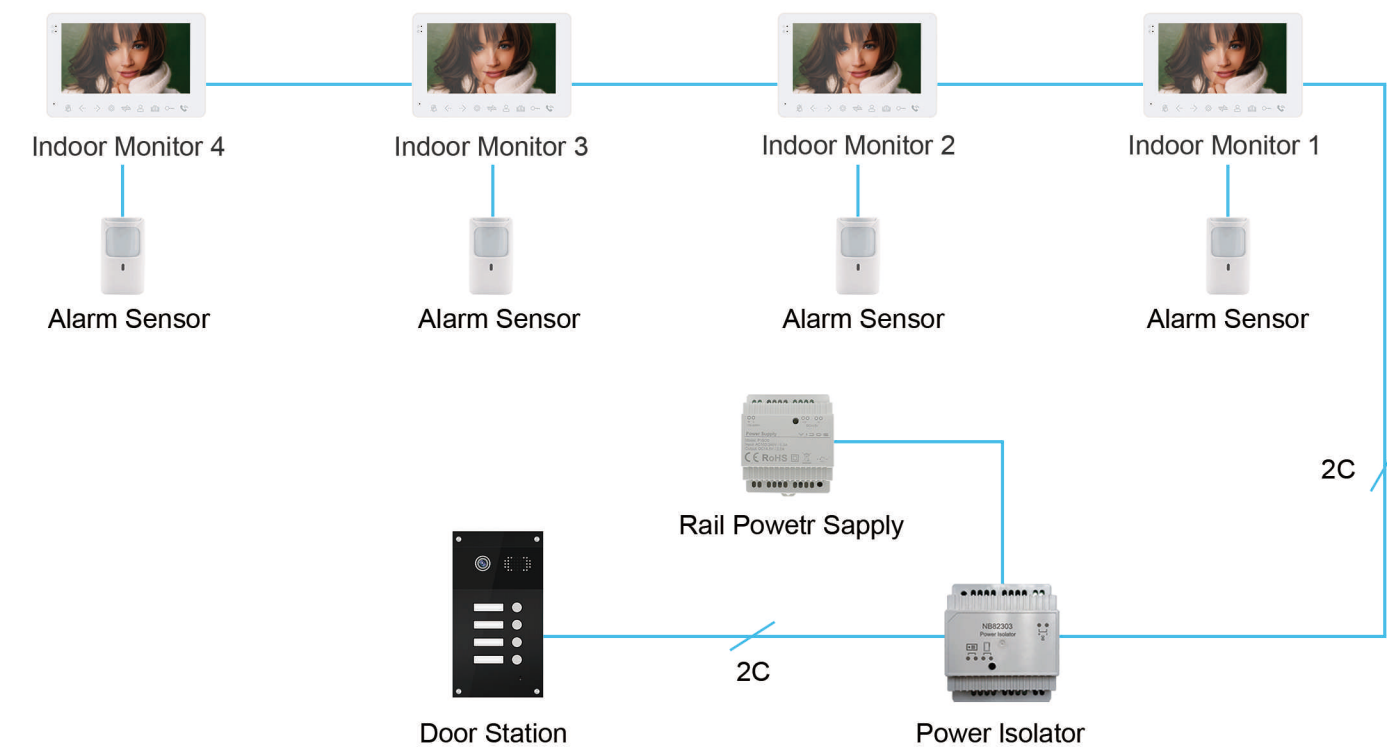

2 WIRE BUS SYSTEM VIDEO DOOR ENTRY DOOR STATION

Security is Simply and Easy to Start from Your Door

In traditional families,visitors knock or use the doorbell , there is no image neither voice and security is non existent. Now , Bcom's 2-wire Video Intercom can solve all these easily, making your home more secure.



Flush Mount



Surface Mount



Model	NB82251A-1	NB82251A-2	NB82251A-3	NB32251A-4
Image				
Surface box	107*194mm	107*194mm	107*194mm	107*194mm
Flush Box	108*209mm	108*209mm	108*209mm	108*209mm
Capacity	1 family	2 family	3 family	4 family
Camera Sensor	800TVL	800TVL	800TVL	800TVL
View Angle	170°	170°	170°	170°
Material	Aluminium Alloy	Aluminium Alloy	Aluminium Alloy	Aluminium Alloy
Power Consumption	Maximum 300mA	Maximum 300mA	Maximum 300mA	Maximum 300mA
Power Supply	Din-rail power	Din-rail power	Din-rail power	Din-rail power
Waterproof	IP65	IP65	IP65	IP65
Work Temp	-40°C ~ +50°C	-40°C ~ +50°C	-40°C ~ +50°C	-40°C ~ +50°C

JeaTone